
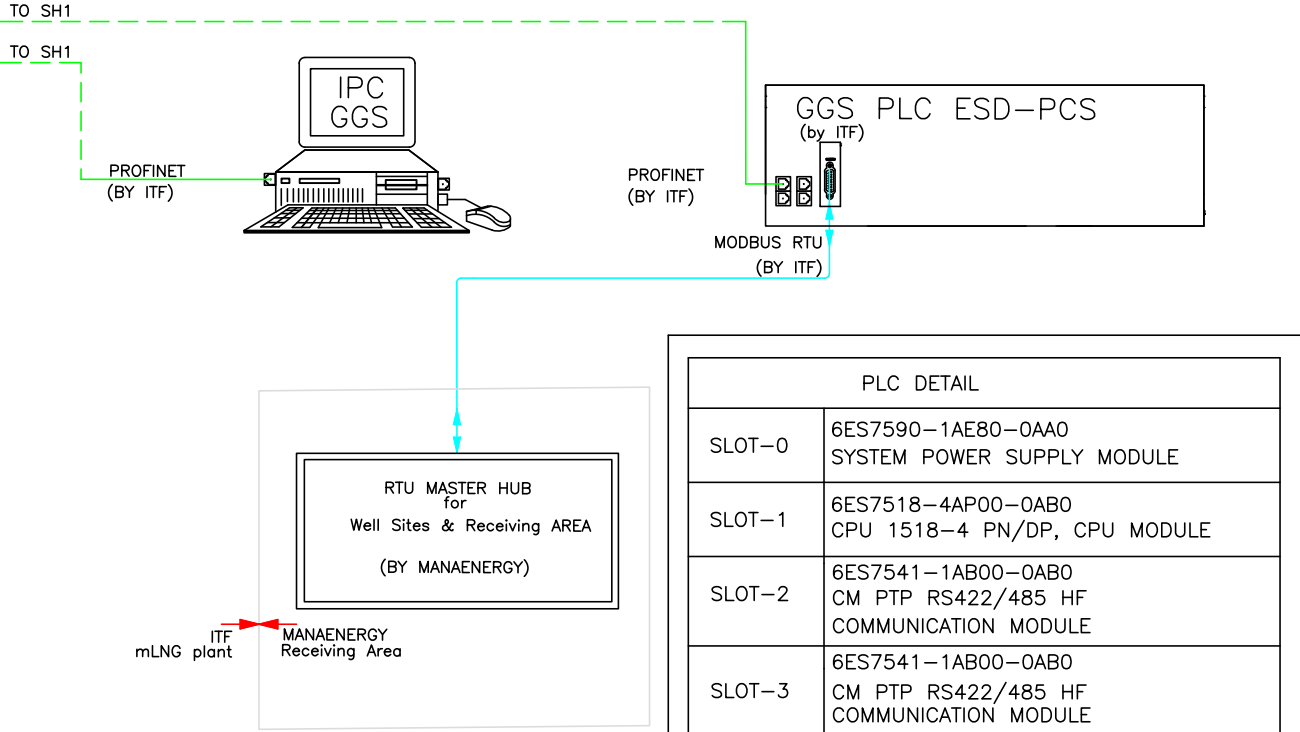


CONTROL ROOM (S439)

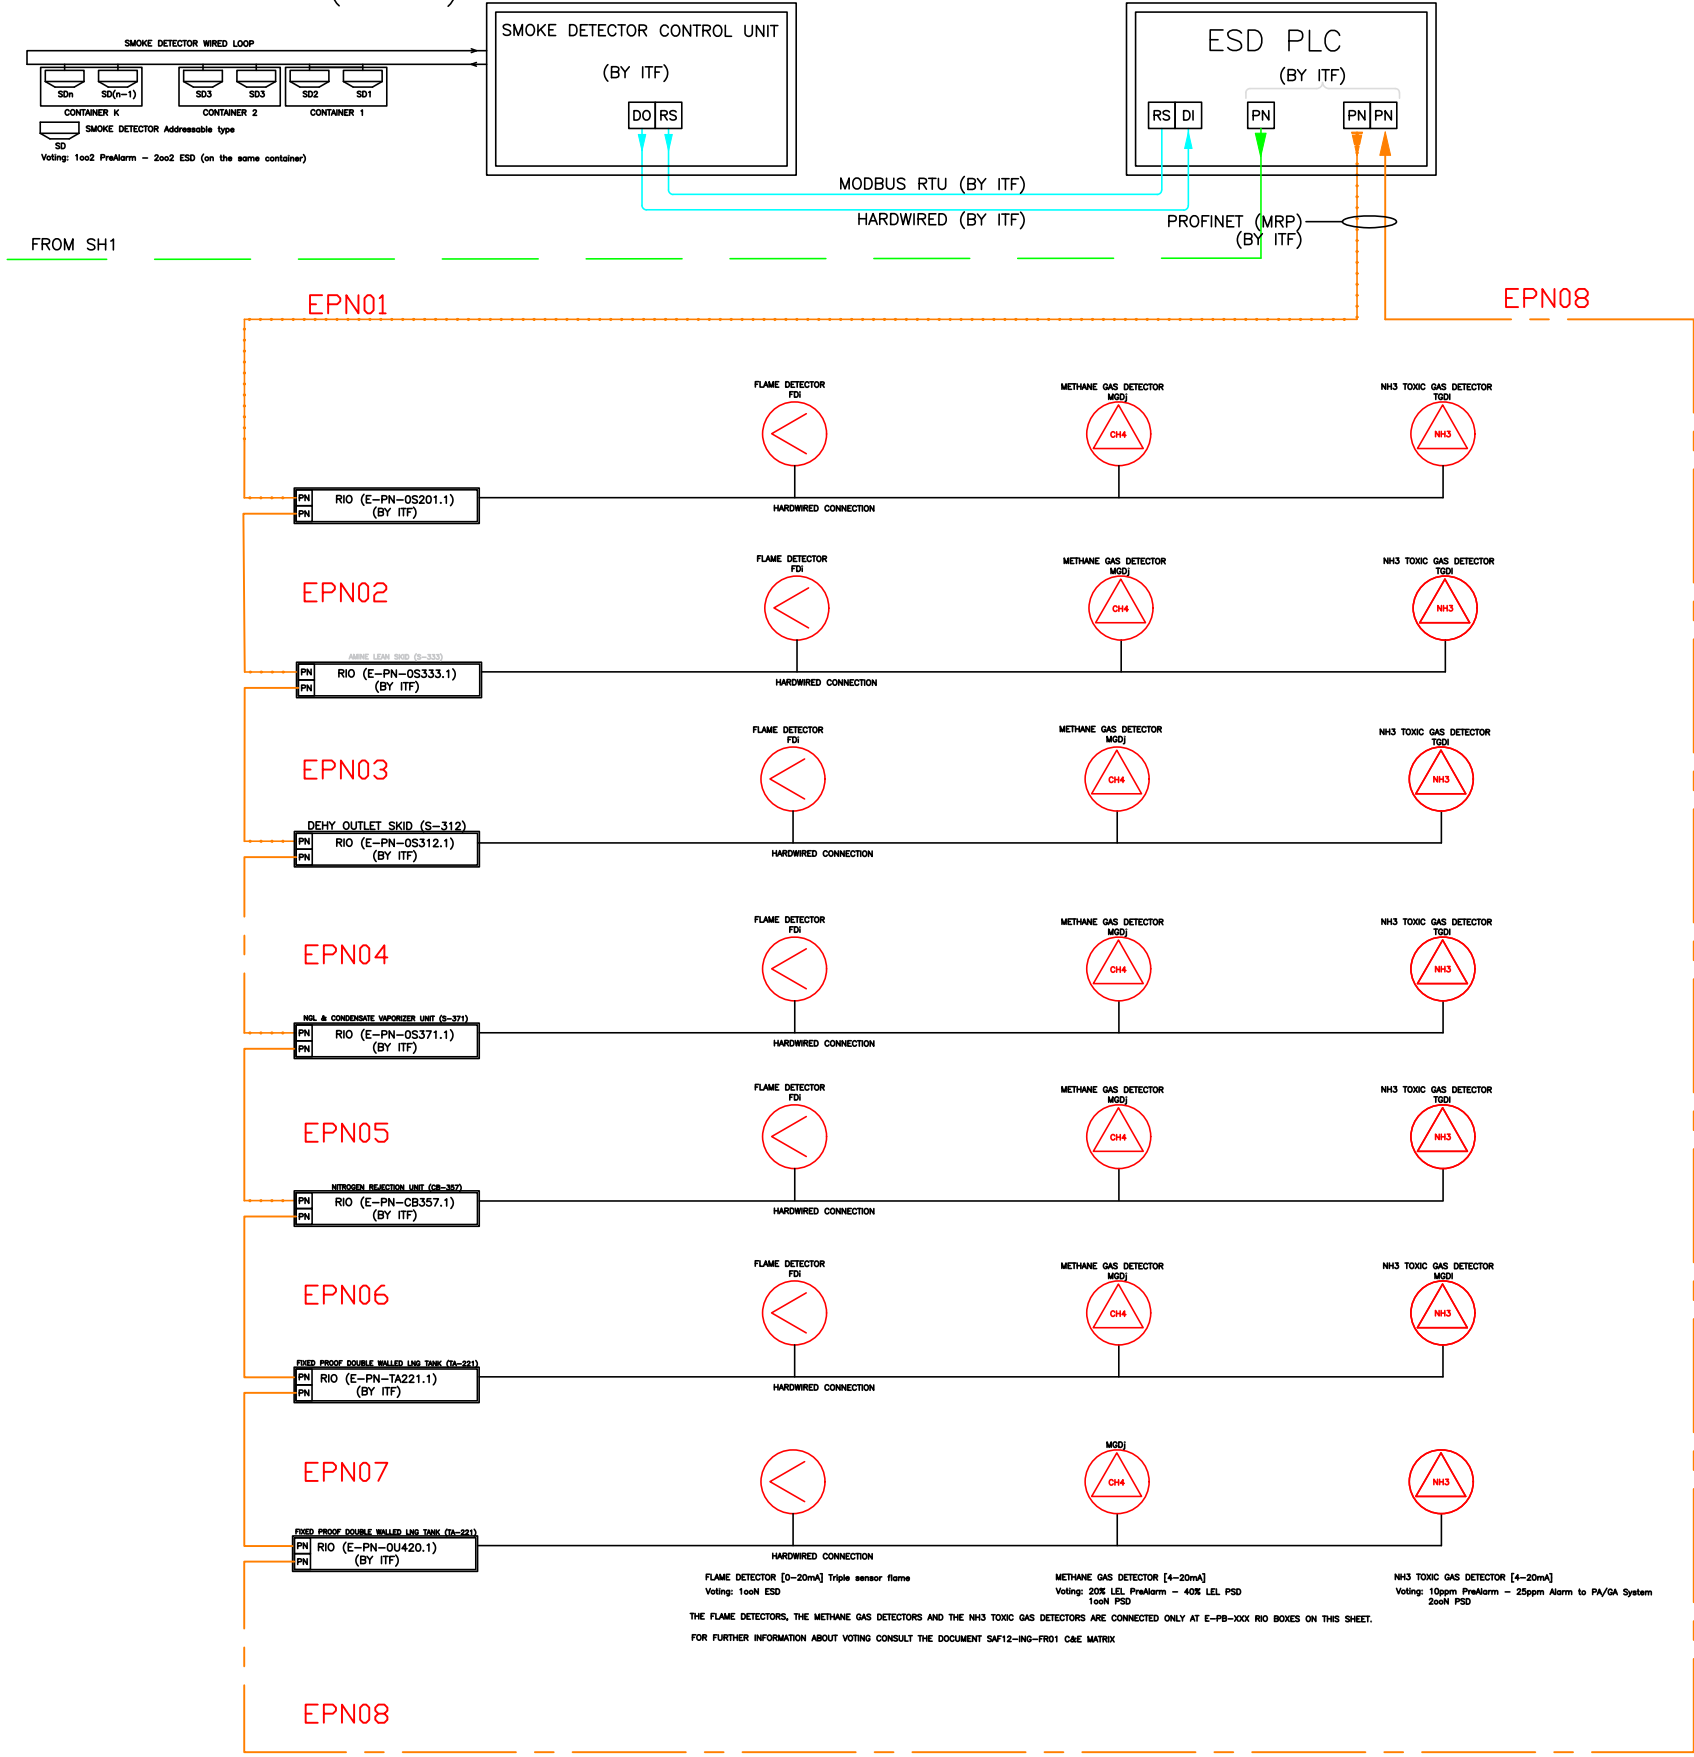

PLC DETAIL	
SLOT-0	6ES7590-1AE80-0AA0 SYSTEM POWER SUPPLY MODULE
SLOT-1	6ES7518-4AP00-0AB0 CPU 1518-4 PN/DP, CPU MODULE
SLOT-2	6ES7541-1AB00-0AB0 CM PTP RS422/485 HF COMMUNICATION MODULE
SLOT-3	6ES7541-1AB00-0AB0 CM PTP RS422/485 HF COMMUNICATION MODULE
SLOT-4	6GK7542-5DX00-0XE0 CM 1542-5 COMMUNICATION MODULE

LEGEND:

PCS=PROCESS CONTROL SYSTEM
ESD=EMERGENCY SHUTDOWN SYSTEM
IPC=INDUSTRIAL PC/ WEB SERVER
GGS=GAS GATERING SYSTEM
RTU=REMOTE TELECOMMUNICATION UNIT

PROFINET (MRP)
(MRP)=(MEDIA REDUNDANCY PROTOCOL)

MODBUS RTU MULTI-DROP (REDUNDANT)

FIBER OPTIC

● MULTI-DROP

SUPPLY BY ITF

SUPPLY BY TAM

SUPPLY BY SEME

NOTE

NOTE 1: The Unit500 Air Compressors, the HotOil Skid and the Power Generators have a local unit PLC.

NOTE 2: The MR Compressors and the BOG Compressors ESD Signals are inside the E-PB-XXXX field boxes.

NOTE 3: The gas Detectors and the Flame Detectors are connected to field boxes E-PB-XXXX.

NOTE 4: The ESD Signals and the ESD Remote I/O are in ITF scope.

NOTE 5: When they are ready, the reference drawing will be insert inside each block.

6	8 APR 25	ISSUED FOR APPROVAL	G.Brunozzi	F. Di Tommaso	L. Compagnone	
5	23 JAN 25	ISSUED FOR APPROVAL	C. Epifani	F. Di Tommaso	L. Compagnone	
4	24 SET 24	ISSUED FOR APPROVAL	C. Epifani	F. Di Tommaso	L. Compagnone	
3	01 AGO 24	ISSUED FOR APPROVAL	C. Epifani	F. Di Tommaso	L. Compagnone	
2	23 FEB 24	ISSUED FOR APPROVAL	C. Epifani	F. Di Tommaso	L. Compagnone	
1	10 JAN 24	ISSUED FOR APPROVAL	C. Epifani	F. Di Tommaso	L. Compagnone	
0	19 JAN 23	ISSUED FOR APPROVAL	TAM (PK)	F.D.	L. Compagnone	
Rev.	Date	Description	Draft	Check'd (ITF)	App'd (ITF)	SOUND ENERGY
Customer: MANAENERGY			OFFICES: Mahaj Riad Center, Batiment 6, 3eme etage, Avenue Al Arz, Hay Riad, 10100 Rabat, Morocco			
Contractor: ITALFLUID			OFFICES: Boulevard de Bourgogne Rue Jaoafar Ibn Habib Residence Al Mashrik II 1ere Etage N3 Casablanca			
Engineering: ITALFLUID			OFFICES: VIA VIVALDI,4 MONTESILVANO (ITALY) Tel.+39 085 4224374 fax+39 085 4220742			
Technology vendor: TECHNICAL AMERICA INC			OFFICES: 301 N Smith Avenue, 92880 Corona, California (USA) Ph.+1 951 272 9540			
TITILE: LNG TENDRARA PLANT			OBJET: PLC ARCHITECTURE/NETWORK			
TYPE	SCALE	DOCUMENTS ID:	VENDOR DOC CODE		SHEET/OF	
A3	INTS	ISD03-ING-PR01	21044-AU-PLA-00001		2/2	