


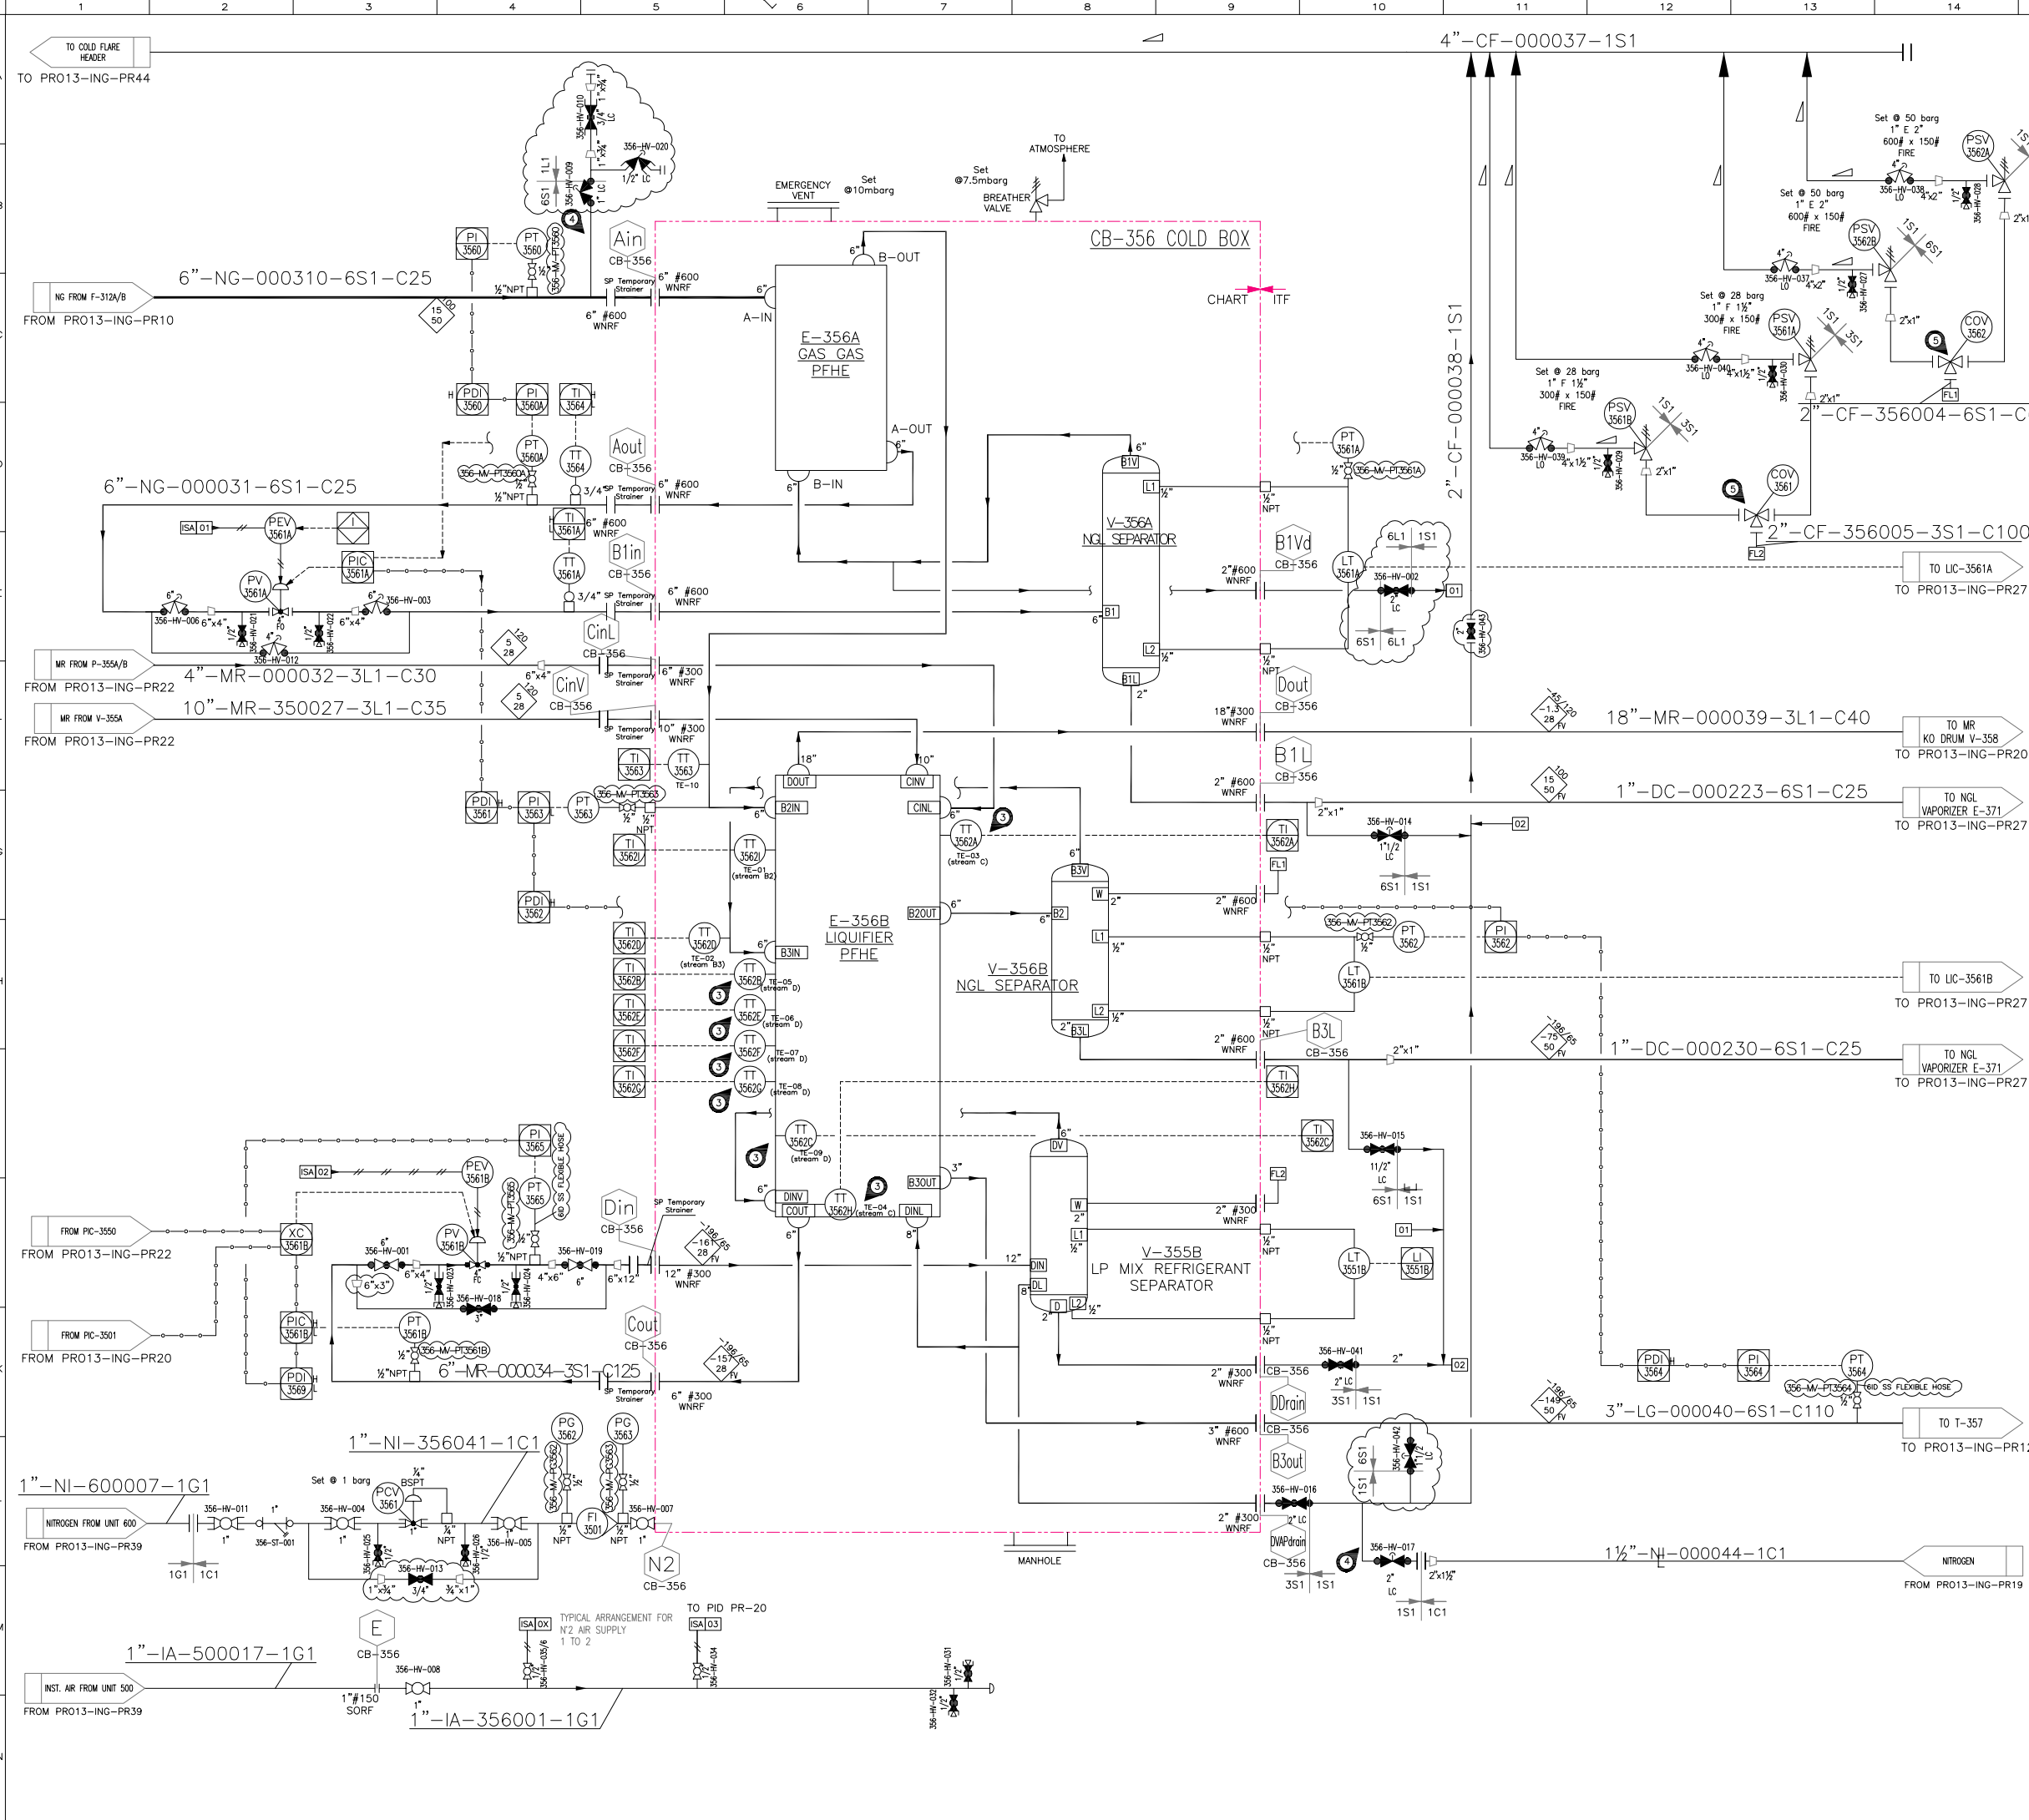

REFERENCE DOCUMENTS

P&ID LEGEND	PRO13-ING-PRO0
PROCESS FLOW DIAGRAM	21044-PR-PID-00000
UTILITY FLOW DIAGRAM	PRO10-ING-PRO1/02/03/04
MATERIAL SELECTION DIAGRAM	21044-PR-PFD-00001
	PRO10-ING-PR11
	21044-PR-UFD-00001
	PRO08-ING-FR01
	21044-PR-MSD-00001

V-356A
NGL SEPARATOR

DESIGN PRESSURE	50 bar g
DESIGN TEMPERATURE	-196/65 °C
DIAMETER	24" NPS
TL TO TL	2023 (80) mm
CORROSION ALLOWANCE	0 mm
INSULATION	Inside CB
LINING/CLADDING	N.A.
MATERIAL	AL
INTERNAL VOLUME	0.63 m3
INTERNAL ELEMENTS	No

V-356B
NGL SEPARATOR

DESIGN PRESSURE	50 bar g
DESIGN TEMPERATURE	-196/65 °C
DIAMETER	24" NPS
TL TO TL	2023 (80) mm
CORROSION ALLOWANCE	0 mm
INSULATION	Inside CB
LINING/CLADDING	N.A.
MATERIAL	AL
INTERNAL VOLUME	0.63 m3
INTERNAL ELEMENTS	No

V-355B
LP MIX REFRIGERANT SEPARATOR

DESIGN PRESSURE	14/28 bar g
DESIGN TEMPERATURE	-196/65 °C
DIAMETER	24" NPS
TL TO TL	3048 (120) mm
CORROSION ALLOWANCE	0 mm
INSULATION	Inside CB
LINING/CLADDING	N.A.
MATERIAL	AL
INTERNAL VOLUME	0.9 m3
INTERNAL ELEMENTS	No

E-356A
GAS-GAS PFHE

DESIGN DUTY	0 (NOTE 1) kW
DESIGN PRES. COLD S.	50 bar g
DESIGN TEMP. COLD S.	-195/65 °C
DESIGN PRES. HOT S.	50 bar g
DESIGN TEMP. HOT S.	-195/65 °C
CORR. ALL. COLD/HOT	0 mm
INSULATION	Inside CB
MATERIAL COLD SIDE	AL
MATERIAL HOT SIDE	AL
SURFACE AREA	HOLD m2

E-356B
LIQUIFIER PFHE

DESIGN DUTY	14373 kW
DESIGN PRES. COLD S.	28 bar g
DESIGN TEMP. COLD S.	-195/65 °C
DESIGN PRES. HOT S.	50 bar g
DESIGN TEMP. HOT S.	-195/65 °C
CORR. ALL. COLD/HOT	0 mm
INSULATION	Inside CB
MATERIAL COLD SIDE	AL
MATERIAL HOT SIDE	AL
SURFACE AREA	HOLD m2

NOTES

- E-356A IS NOT REQUIRED WITH DESIGN FEED GAS COMPOSITION. VALVE PV-3561A IS ALWAYS FULLY OPEN AT DESIGN CONDITION. E-356A IS ADDED TO ALLOW A CONTROL ON NGL TEMPERATURE FORMATION. DESIGN DUTY FOR THIS EXCHANGER IS 276 KW.
- VENT FOR N2
- TEMPERATURE TRANSMITTERS FOR PFHE CORE TEMPERATURE MONITORING (TO BE USED DURING COOLING DOWN)
- NITROGEN FOR DEFREEZING
- CHANGE OVER VALVE WITH LOCK DEVICE
- ALL INSTRUMENTS AND MANUAL VALVES ON THIS P&ID AND OUT OF SKID LIMITS WILL BE SUPPLIED BY TAM AS LOOSE ITEMS.

----- TAM SUPPLY LIMIT

6	30 Mar 2026	APPROVED FOR CONSTRUCTION	TAM (JB)	TAM (MM)	LOAMPLONE
5	15 Oct 2025	APPROVED FOR CONSTRUCTION	TAM (LD)	LOAMPLONE	W.BOUALAI
4	24 Jun 2024	APPROVED FOR CONSTRUCTION	TAM (LD)	LOAMPLONE	W.BOUALAI
3	25 Jul 2023	ISSUED FOR APPROVAL	TAM (LD)	LOAMPLONE	W.BOUALAI
2	08 Nov 2022	ISSUED FOR APPROVAL	TAM (LD)	LOAMPLONE	W.BOUALAI
1	25 Jul 2022	ISSUED FOR APPROVAL	TAM (ES)	LOAMPLONE	W.BOUALAI
0	30 Jun 2022	ISSUED FOR APPROVAL	TAM (ES)	LOAMPLONE	W.BOUALAI

Customer: MANAENERGY

Contractor: ITALFLUID

Engineering: ITALFLUID

Technology Vendor: TECHNICAL AMERICA INC

TITLE: LNG TENDRARA PLANT

OBJECT: P&ID COLD BOX CB-356 (UNIT 350)

TYPE	SCALE	DOCUMENTS ID	VENDOR DOC. CODE	SHEET/OF
A1	N/A	PRO13-ING-PR11	21044-PR-PID-35011	1/1