


C-351H-1		MC-351H-1	
MR COMPRESSOR HP 1		MR COMPRESSOR HP MOTOR 1	
SPEED	2950 rpm	SPEED	2950 rpm
SWEEP VOLUME	1997 m3/h	RATED POWER	560 kW
VI	2.2	VOLTAGE	690 Vdc
MODEL	WP-W36S-28	FREQUENCY	50 Hz
MANUFACTURER	GEA	STARTING	VFD
CASING DESIGN PRESSURE	28 barg	ENCLOSURE PROTECTION	IP55
CASING DESIGN TEMPERATURE	-60/120 °C	STD	IEC
CASING MATERIAL	CAST IRON	FRAME SIZE	355L

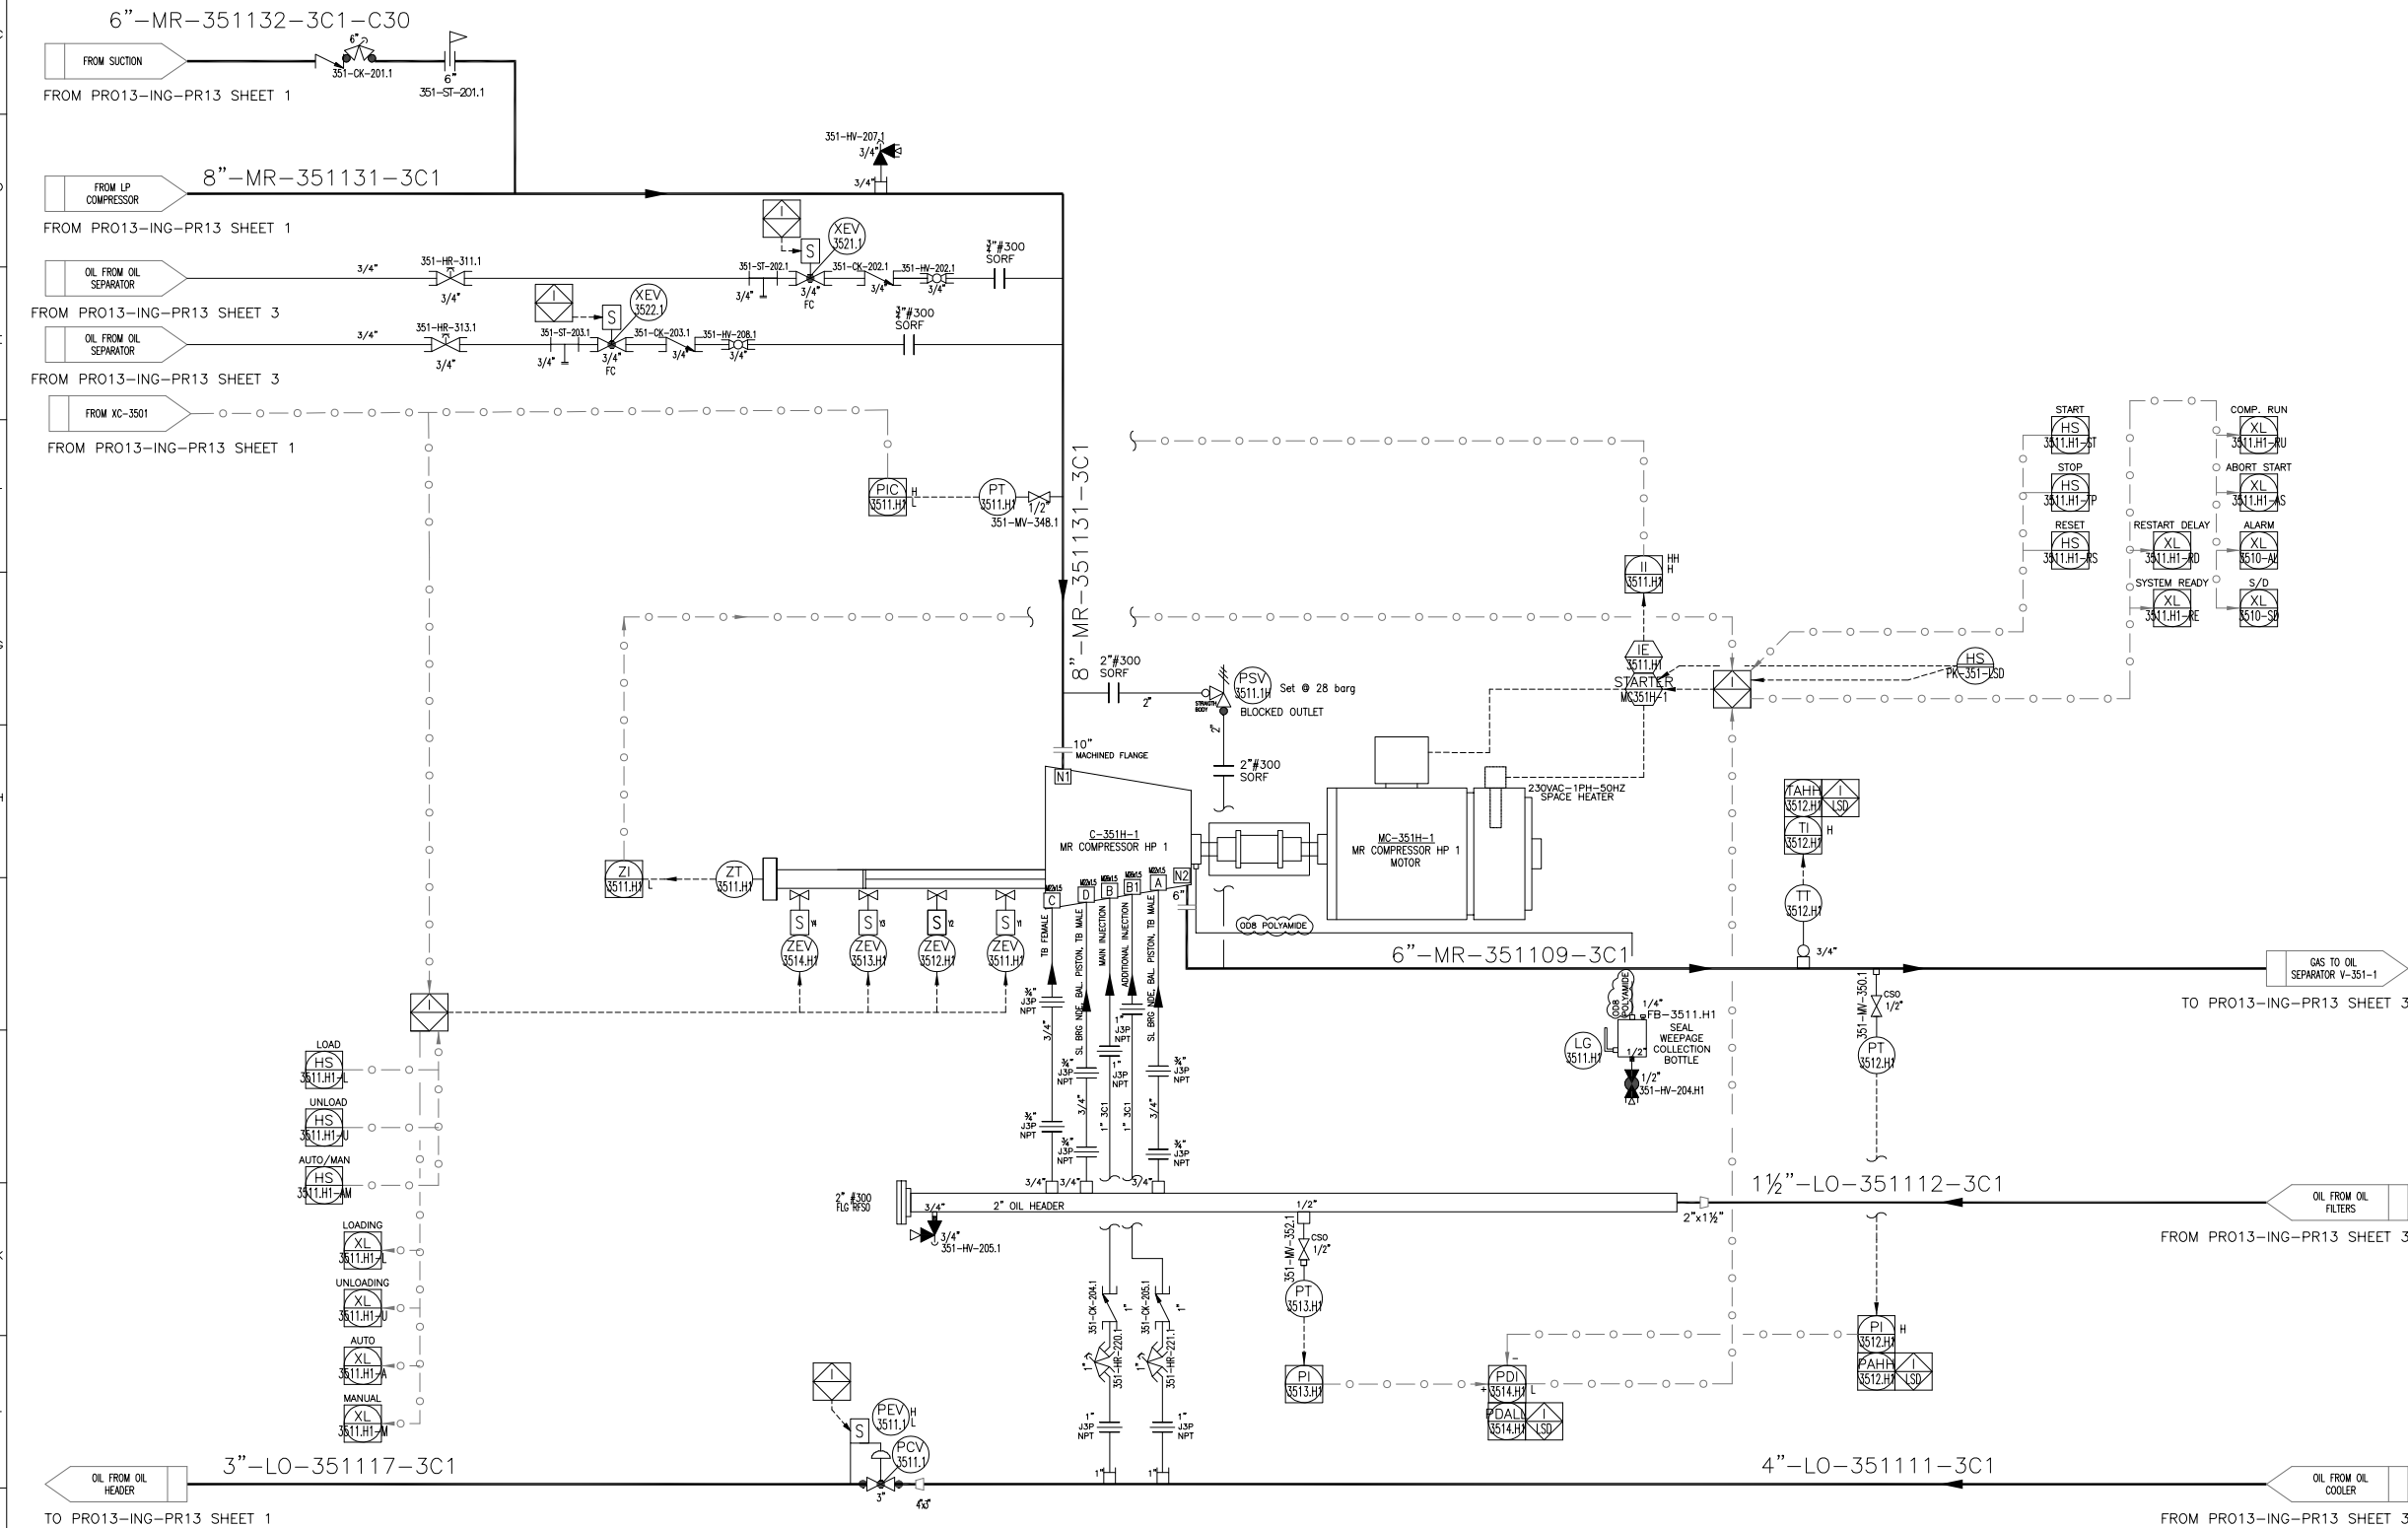

REFERENCE DOCUMENTS

P&ID LEGEND	PRO13-ING-PRO0
PROCESS FLOW DIAGRAM	21044-PR-PID-00000
UTILITY FLOW DIAGRAM	PRO10-ING-PRO1/02/03/04
MATERIAL SELECTION DIAGRAM	21044-PR-PFD-00001
	PRO10-ING-PR11
	21044-PR-UFD-00001
	PRO08-ING-FR01
	21044-PR-MSD-00001


INSTRUMENT SUPPLY AIR

NOTES:

----- TAM SUPPLY LIMIT

7	25 Mar 2026	ISSUE FOR COMMISSIONING	TAM (JB)	TAM (MM)	LOAMPLONE
6	19 Jan 2026	AS BUILT (TEMPLATE CHANGED)	TAM (JB)	LOAMPLONE	W.BOUJALI
5	20 Mar 2025	AS BUILT	TAM (JB)	LOAMPLONE	W.BOUJALI
4	24 Jun 2024	APPROVED FOR CONSTRUCTION	TAM (LD)	LOAMPLONE	W.BOUJALI
3	18 Aug 2023	ISSUED FOR APPROVAL	TAM (LD)	LOAMPLONE	W.BOUJALI
2	26 Jul 2023	ISSUED FOR APPROVAL	TAM (LD)	LOAMPLONE	W.BOUJALI
1	02 Nov 2022	ISSUED FOR APPROVAL	TAM (LD)	LOAMPLONE	W.BOUJALI
0	27 Jul 2022	ISSUED FOR APPROVAL	TAM (MM)	LOAMPLONE	W.BOUJALI

Rev.	Date	Description	Drawt	Check'd	Approved
 Customer: MANAENERGY			OFFICES: Mahaj Riad Center, Batiment 6, 3eme etage, Avenue Al Arz, Hay Ryad, 10100 Rabat, Morocco		
 Contractor: ITALFLUID			OFFICES: VIA VVALDI,4 MONTESILVANO (ITALY) Tel.+39 085 4224374 fax+39 085 4220742		
 Engineering: ITALFLUID			OFFICES: VIA VVALDI,4 MONTESILVANO (ITALY) Tel.+39 085 4224374 fax+39 085 4220742		
 Technology Vendor: TECHNICAL AMERICA INC			OFFICES: 301 N Smith Avenue, 92880 Corona, California (USA) Ph.+1 951 272 9540		
TITLE: LNG TENDRARA PLANT			OBJECT: P&ID PACKAGE PK-351-1 (UNIT 350)		
TYPE	SCALE	DOCUMENTS ID:	VENDOR DOC CODE:		SHEET/OF
A1	N/A	PRO13-ING-PR13	21044-PR-PID-35001		2/3

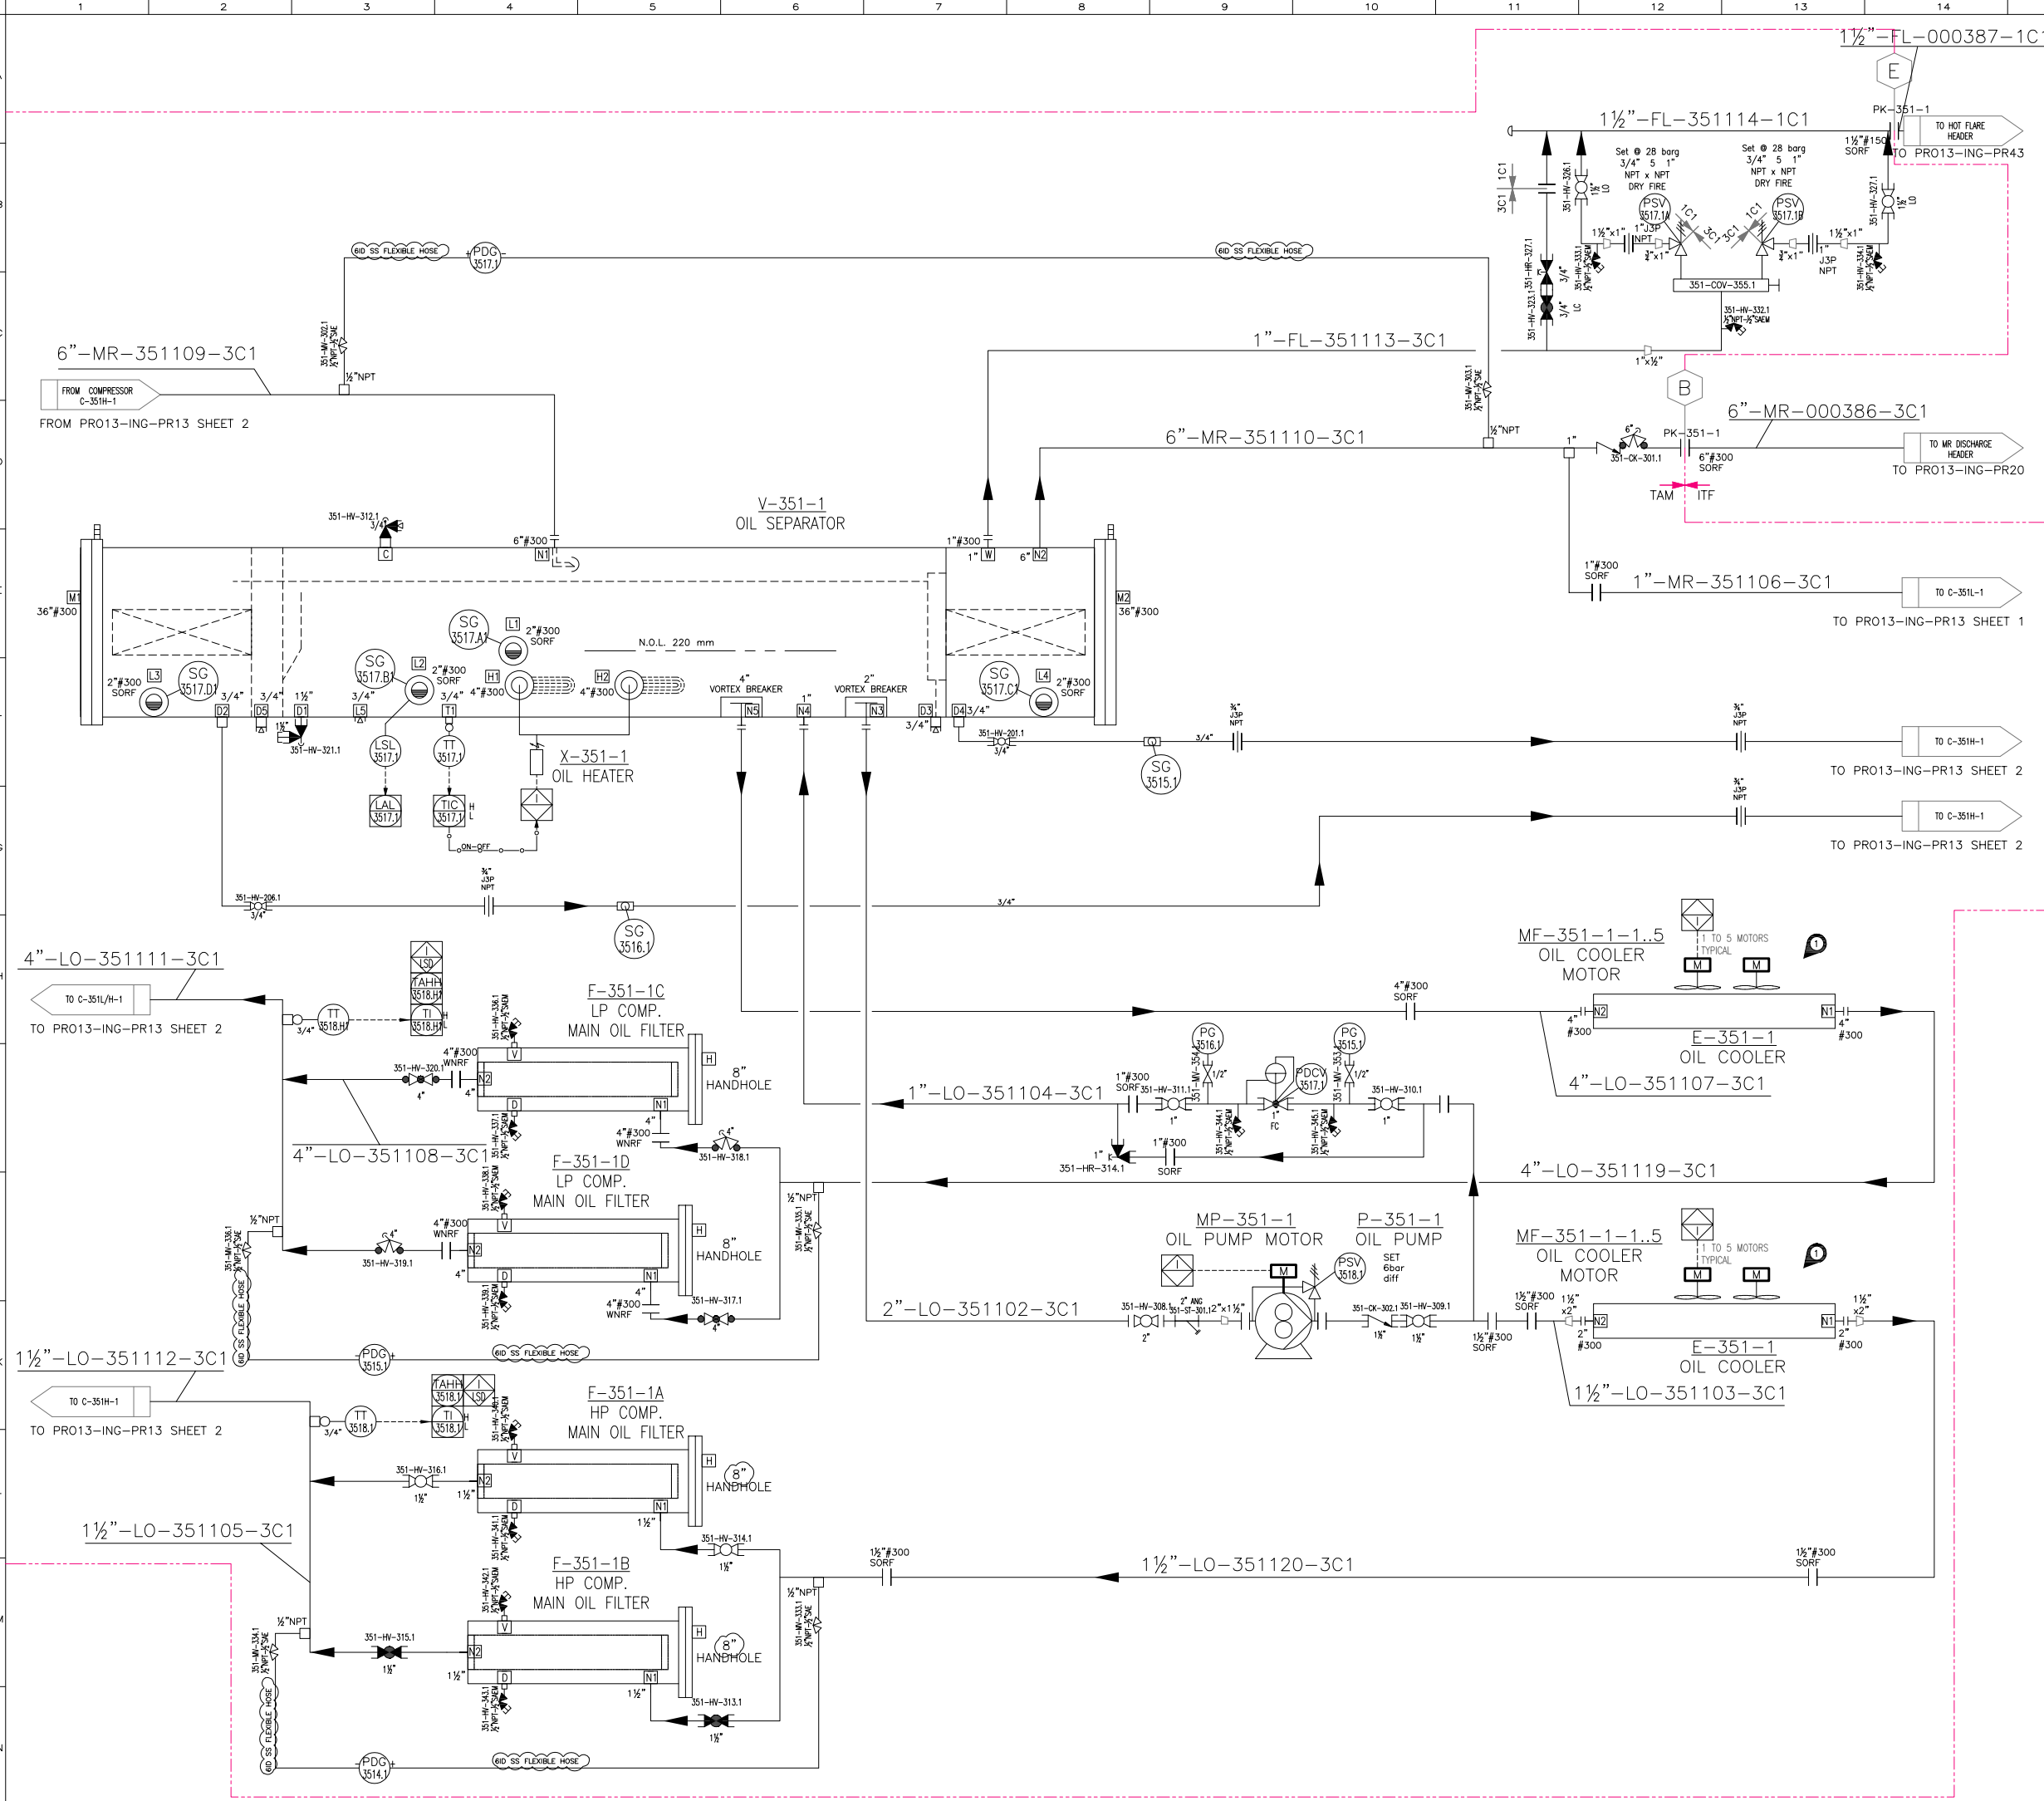

REFERENCE DOCUMENTS

P&ID LEGEND	PRO13-ING-PROO
PROCESS FLOW DIAGRAM	21044-PR-PID-00000
UTILITY FLOW DIAGRAM	PRO10-ING-PRO1/02/03/04
MATERIAL SELECTION DIAGRAM	21044-PR-PFD-00001
	PRO10-ING-PR11
	21044-PR-UFD-00001
	PRO08-ING-FR01
	21044-PR-MSD-00001

V-351-1

OIL SEPARATOR

DESIGN PRESSURE	28 bar g
DESIGN TEMPERATURE	-15/120 °C
VOLUME	965 00 mm
DIAMETER	5000 mm
SM TO SM	0 mm
CORROSION ALLOWANCE	0 mm
INSULATION	NO
LINING/CLADDING	N.A.
MATERIAL	CS
INTERNAL VOLUME	3.4 m3
INTERNAL ELEMENTS	COALESCE

MP-351-1

OIL PUMP ELECTRIC MOTOR

SPEED	1450 rpm
RATED POWER	4 kW
VOLTAGE	690 Vac
FREQUENCY	50 Hz
STARTING	DOL
ENCLOSURE PROTECTION	IP55
STD	IEC
FRAME SIZE	112

F-351-1A/B

HP COMP. MAIN OIL FILTER

DESIGN PRESSURE	34 bar g
DESIGN TEMPERATURE	-15/120 °C
DIAMETER	8" NPS
SM TO SM	600 mm
CORROSION ALLOWANCE	0 mm
INSULATION	NO
LINING/CLADDING	N.A.
MATERIAL	CS
INTERNAL VOLUME	0.01 m3
INTERNAL ELEMENTS	PARTICULATE FILTER

MF-351-1-1...10

OIL COOLER FAN ELECTRIC MOTORS

SPEED	1450 rpm
RATED POWER	4 kW
VOLTAGE	400/3 Vac
FREQUENCY	50 Hz
STARTING	DOL
ENCLOSURE PROTECTION	IP55
STD	IEC
FRAME SIZE	112M

F-351-1-1...10

FAN

SPEED	1450 rpm
RATED CAPACITY	27634 m3/h
ABSORBED POWER	3 kW

P-351-1

OIL PUMP

SPEED	1450 rpm
RATED CAPACITY	110 l/min
HEAD	4 bar
TYPE	VOLUMETRIC
MANUFACTURER	KRACHT
CASING DESIGN PRESSURE	34 barg
CASING DESIGN TEMPERATURE	-15/120 °C
MODEL	KF80
MOTOR POWER	4 kW
CASING MATERIAL	CI

X-351-1

OIL HEATER

RATED POWER	2.25 (3x 0.75) kW
SUPPLY VOLTAGE	690 Vac-50Hz-3ph

F-351-1

OIL COOLER

DESIGN DUTY	380 kW
DESIGN PRESSURE	28 / 34 bar g
DESIGN TEMP.	-15/120 °C
MATERIAL	AS304 / A1
CORR. ALL.	0 mm
FAN Qty	10
FAN ABS POWER each	3 kW
SURFACE AREA	4304 m2

F-351-1C/D

LP COMP. MAIN OIL FILTER

DESIGN PRESSURE	28 bar g
DESIGN TEMPERATURE	-15/120 °C
DIAMETER	8" NPS
SM TO SM	1000 mm
CORROSION ALLOWANCE	0 mm
INSULATION	NO
LINING/CLADDING	N.A.
MATERIAL	CS
INTERNAL VOLUME	0.033 m3
INTERNAL ELEMENTS	PARTICULATE FILTER

NOTES:

OIL COOLER CAN BE SPLIT IN 2 SEPARATE OIL COOLERS OR COMBINED IN ONE OIL COOLER WITH SEPARATE CIRCUIT.

7	25 Mar 2026	ISSUE FOR COMMISSIONING	TAM (JB)	TAM (MM)	LOAMPLONE
6	19 Jan 2026	AS BUILT (TEMPLATE CHANGED)	TAM (JB)	LOAMPLONE	W.BOUALAI
5	20 Mar 2025	AS BUILT	TAM (JB)	LOAMPLONE	W.BOUALAI
4	24 Jun 2024	APPROVED FOR CONSTRUCTION	TAM (LD)	LOAMPLONE	W.BOUALAI
3	18 Aug 2023	ISSUED FOR APPROVAL	TAM (LD)	LOAMPLONE	W.BOUALAI
2	26 Jul 2023	ISSUED FOR APPROVAL	TAM (LD)	LOAMPLONE	W.BOUALAI
1	02 Nov 2022	ISSUED FOR APPROVAL	TAM (LD)	LOAMPLONE	W.BOUALAI
0	27 Jul 2022	ISSUED FOR APPROVAL	TAM (MM)	LOAMPLONE	W.BOUALAI
Rev.	Date	Description	Draft	Check'd	Approved

Customer: MANAENERGY

Contractor: ITALFLUID

Engineering: ITALFLUID

Technology Vendor: TECHNICAL AMERICA INC

Offices: Mahaj Rad Center, Batiment 6, 3eme etage, Avenue Al Az, Hay Ryad, 10100 Rabat, Morocco

Offices: VIA VIVALDI,4 MONTESILVANO (ITALY) Tel.+39 085 4224374 fax+39 085 4220742

Offices: VIA VIVALDI,4 MONTESILVANO (ITALY) Tel.+39 085 4224374 fax+39 085 4220742

Offices: 301 N Smith Avenue, 92880 Corona, California (USA) Ph.+1 951 272 9540

Offices: P&ID

Object: PACKAGE PK-351-1 (UNIT 350)

TYPE: A1

SCALE: N/A

DOCUMENTS ID: PRO13-ING-PR13

VENDOR DOC CODE: 21044-PR-PID-35001

SHEET/OF: 3/3