


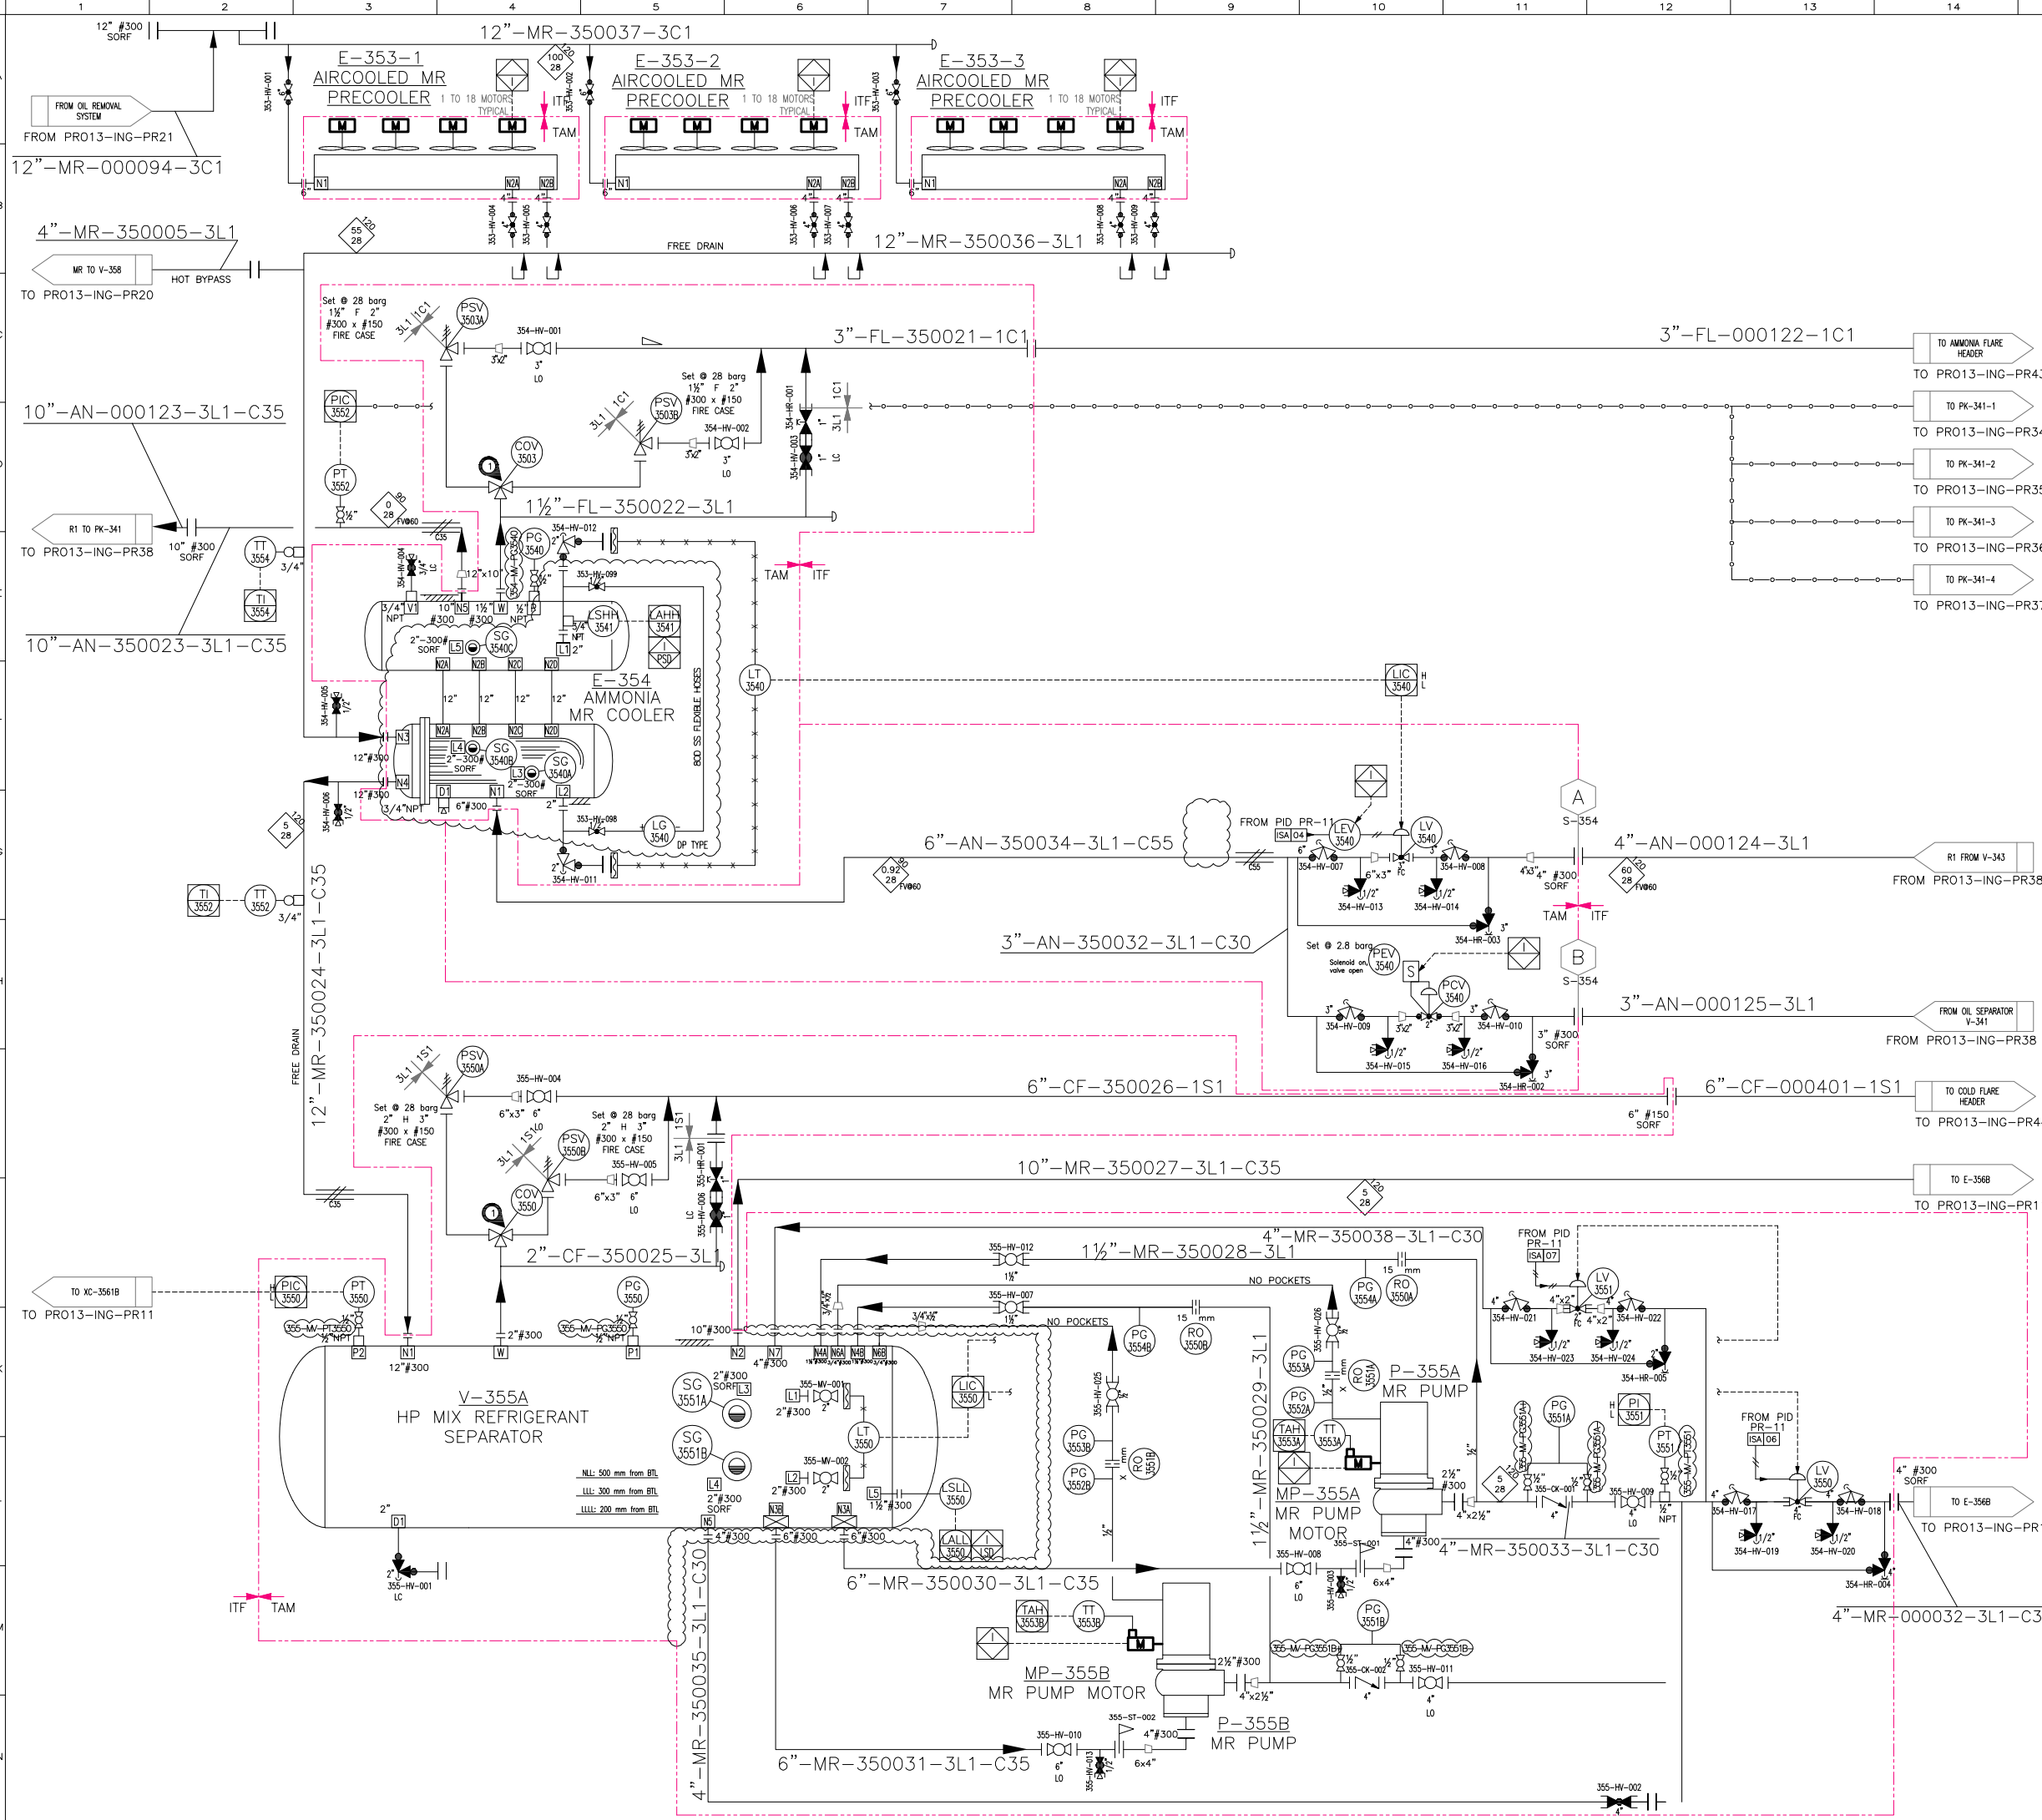

15		16		17		18	
REFERENCE DOCUMENTS							
P&ID LEGEND				PRO13-ING-PRO0			
PROCESS FLOW DIAGRAM				21044-PR-PID-00000			
UTILITY FLOW DIAGRAM				PRO10-ING-PRO6/07			
MATERIAL SELECTION DIAGRAM				21044-PR-UFD-00001			
				PRO08-ING-FR01			
				21044-PR-MSD-00001			
V-355A HP MIX REFRIGERANT SEPARATOR				E-354 AMMONIA MR COOLER			
DESIGN PRESSURE DESIGN TEMPERATURE DIAMETER TL TO TL CORROSION ALLOWANCE INSULATION LINING/CLADDING MATERIAL INTERNAL VOLUME INTERNAL ELEMENTS				FV/28 bar g -45/120 °C 1500 mm 6000 mm 0 mm C (40 mm) N/A LTCs 11.5 m3 No			
F-353-1/2/3 AIRCOOLED MR PRECOOLER				F-353-1-1/1-18-18/.../3-1/3-18 FAN			
DESIGN DUTY DESIGN PRES. DESIGN TEMP. MATERIAL CORR. ALL FAN Qty FAN RATED POWER each SURFACE AREA				1918 (3x33%) kW FV/28 bar g -45/120 °C 304 tube / A1 fin 0 mm 18 4 kW HOLD m2			
MF-353-1-1/1-18-18/.../3-1/3-18 FAN ELECTRIC MOTOR				P-355A/B MR PUMPS			
SPEED RATED POWER VOLTAGE FREQUENCY STARTING ENCLOSURE PROTECTION STD FRAME SIZE				HOLD rpm 4 kW 400 Vac 50 Hz IP55 IEC HOLD			
				MP-355A/B MR PUMP ELECTRIC MOTOR			
				SPEED RATED POWER VOLTAGE FREQUENCY STARTING ENCLOSURE PROTECTION STD FRAME SIZE			
				3000 rpm 15 kW 690 Vac 50 Hz VFD IP55 Manuf. std C3			
ISA 0X INSTRUMENT SUPPLY AIR							
NOTES							
CHANGE OVER VALVE WITH LOCK DEVICE							
ALL INSTRUMENTS AND MANUAL VALVES ON THIS P&ID AND OUT OF SKID LIMITS WILL BE SUPPLIED BY TAM AS LOOSE ITEMS.							
----- TAM SUPPLY LIMIT							
7	27 Mar 2026	APPROVED FOR CONSTRUCTION			TAM (JB)	TAM (MM)	L.CAMPLONE
6	29 May 2025	APPROVED FOR CONSTRUCTION			TAM (LD)	L.CAMPLONE	W.BOUALAI
5	15 Feb 2024	APPROVED FOR CONSTRUCTION			TAM (LD)	L.CAMPLONE	W.BOUALAI
4	18 Aug 2023	ISSUED FOR APPROVAL			TAM (LD)	L.CAMPLONE	W.BOUALAI
3	13 Oct 2022	ISSUED FOR APPROVAL			TAM (LD)	L.CAMPLONE	W.BOUALAI
2	25 Jul 2022	ISSUED FOR APPROVAL			TAM (LD)	L.CAMPLONE	W.BOUALAI
1	14 Jul 2022	ISSUED FOR APPROVAL			TAM (ES)	L.CAMPLONE	W.BOUALAI
0	30 Jun 2022	ISSUED FOR APPROVAL			TAM (ES)	L.CAMPLONE	W.BOUALAI
Rev.	Date	Description			Draft	Check'd	Approved
Customer:		MANAENERGY			OFFICES: Mahaj Riad Center, Batiment 6, 3eme etage, Avenue Al Arz, Hay Riad, 10100 Rabat, Morocco		
Contractor:		ITALFLUID			OFFICES: VIA VVALDI,4 Tel.+39 085 4224374 fax+39 085 4220742		
Engineering:		ITALFLUID			OFFICES: VIA VVALDI,4 Tel.+39 085 4224374 fax+39 085 4220742		
Technology Vendor:		TECHNICAL AMERICA INC			OFFICES: 301 N Smith Avenue, 92880 Corona, California (USA) Ph.+1 951 272 9540		
TITLE: LNG TENDRARA PLANT					OBJECT: P&ID S-354 - UNIT 350		
TYPE	SCALE	DOCUMENTS ID:			VENDOR DOC. CODE		SHEET/OF
A1	N/A	PRO13-ING-PR22			21044-PR-PID-35010		1/1